



## INDUSTRIAL RADIO REMOTE CONTROL



## F21-2S Industrial radio remote control



**F21-2S**

**F21-2S-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>2</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>2 Single speed push button +1 start button+1 emergency stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-2D Industrial radio remote control



**F21-2D**



**F21-2D-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>4</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>2 Double speed push button+1 start button+1 emergency stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-4S Industrial radio remote control



**F21-4S**



**F21-4S-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>4</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>4 Single speed push button +1 start button+1 emergency stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F21-4D Industrial radio remote control



**F21-4D**

**F21-4D-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors,
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>6</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO
<b>Number of push button</b>	<b>4 Double speed push button +1 start button +1 emergency stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/12v or DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-6S Industrial radio remote control



**F21-6S**



**F21-6S-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>6</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>6 Single speed push button +1 start/alarm button +1 stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-E1 Industrial radio remote control



**F21-E1**



**F21-E1-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>6</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>6 Single speed push button +1 start button +1 emergency stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-E1Q Industrial radio remote control



**F21-E1Q**



**F21-E1Q-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>6</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>6 Single speed push button +1 start button+1 emergency stop button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## PLL Series C-E1Q Industrial radio remote control



**C-E1Q**



**C-E1Q-2TX**

### SPECIFICATION:

Application	Hoist, winches, lifts, doors and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz, 425.5925-446.725MHz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>6</b>
Control distance	<b>Up to 200m</b>
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>6 Single speed push button +1 start button+1 emergency stop button.</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	<b>4 AA-size batteries</b>
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-6D Industrial radio remote control



**F21-6D**



**F21-6D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>10</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>6 Double speed push button+1start+1stop + 1 emergency stop button+ 1 rotary switch button</b>
Unique code	Over 4.3billon unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F24-6D Industrial radio remote control



**F24-6D**



**F24-6D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>10</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>6 Double speed push button+1 start button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year





## F24-8S Industrial radio remote control



**F24-8S**



**F24-8S-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>8</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:208
<b>Number of push button</b>	<b>8 Single speed push button +1 start+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F24-8D Industrial radio remote control



**F24-8D**



**F24-8D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>13</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>8 Double speed push button+1 start +1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F24-10S Industrial radio remote control



**F24-10S**



**F24-10S-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>10</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>10 Single speed push button+1 start+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F24-10D Industrial radio remote control



**F24-10D**



**F24-10D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>16</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>10 Double speed push button + 1 start + 1 Emergency stop button + 1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Material	glass fiber



## F24-12S Industrial radio remote control



**F24-12S**



**F24-12S-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>11</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>11 Single speed push button + 1 start+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F24-12D Industrial radio remote control



**F24-12D**



**F24-12D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz;425.5925-446.7725Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>18</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>11 Double speed push button +1 start+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-14S Industrial radio remote control



**F21-14S**

**F21-14S-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>14</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO
<b>Number of push button</b>	<b>14 Single speed push button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/ DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F21-14D Industrial radio remote control



**F21-14D**



**F21-14D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>28</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>14 Double speed push button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-16S Industrial radio remote control



**F21-16s-2TX**

**F21-16S**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>16</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO
<b>Number of push button</b>	<b>16 Single speed push button +1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F21-16D Industrial radio remote control



**F21-16D**



**F21-16D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>32</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO
<b>Number of push button</b>	<b>16 Double speed push button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-18S Industrial radio remote control



**F21-18S**



**F21-18S-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>18</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO
<b>Number of push button</b>	<b>18 Single speed push button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/12v or DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-18D Industrial radio remote control



**F21-18D**



**F21-18D-2TX**


### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>36</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>18 Double speed push button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F21-20S Industrial radio remote control



**F21-20S-2TX**

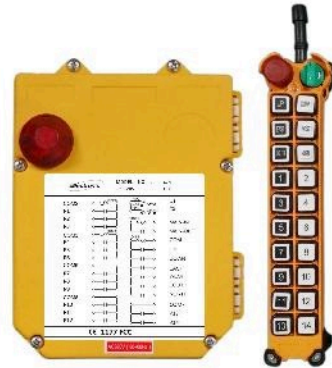

**F21-20S**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>20</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>20 Single speed push button +1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F21-20D Industrial radio remote control



**F21-20D**



**F21-20D-2TX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>40</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>20 Double speed push button+1 Emergency stop button+1 Rotary switch button</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber



## F24-60 Industrial radio remote control



**F24-60-TX**



**F24-60-RX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>40</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>Dual speed joystick</b>
Unique code	Over 4.3billon unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	4AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F23-A++ Industrial radio remote control



**F23-A+++---TX**



**F23-A+++---RX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>8</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>8 Single speed push button+1 START+1 STOP</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber

## F23-BB Industrial radio remote control



**F23-BB-TX**



**F23-BB-RX**

### SPECIFICATION:

Application	Overhead cranes, hoist ,chain hoist and other industrial machine.
<b>Frequency</b>	<b>310.0325~331.165Mhz</b>
Frequency generation:	Crystal (plug in)
Channel	80
Channel Spacing	0.2675MHz
<b>Control motions</b>	<b>10</b>
Control distance	Up to 100m
Certificates	CE, FCC, ISO9001:2008
<b>Number of push button</b>	<b>10 Single speed push button+1 START+1 STOP</b>
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ~ +80°C
Enclosure protection class	IP65
Transmitter power	AA-size batteries
<b>Receiver power</b>	<b>AC 380v/220V/110v/48v/ 36v/24v or AC/DC12V</b>
Output capacity	Full sealed relay output with 5 amperes
Warranty	1 year
Material	glass fiber